LOW VOLTAGE MOSFET (N-CHANNEL)



SOP-8



FEATURES

- Ultra low on-resistance:V_{DS}=30V,I_D=13A,$R_{DS(ON)}$≤11.5mΩ@V_{GS}=10V
- For high side switch applications
- For general purpose applications
- Surface Mount device

MECHANICAL DATA

- Case: SOP-8
- Case Material: Molded Plastic. UL flammability
- Classification Rating: 94V-0
- Weight: 0.3 grams (approximate)

MAXIMUM RATINGS (T_A = 25°C unless otherwise noted)

Parameter		Symbol	Value	Unit
Drain-source voltage		V_{DS}	30	V
Gate-source voltage		V_{GS}	±20	V
Continuous drain current	T_A = 25°C	I_D	13	A
	T_A = 70°C		10.4	A
Pulsed drain current		I_{DM}	100	A
Avalanche current		I_{AS},I_{AR}	22	A
Avalanche energy L=0.1mH		E_{AS},E_{AR}	24	mJ
Power dissipation	T_A = 25°C	P_D	3.1	W
	T_A = 70°C		2	W
Thermal resistance from Junction to ambient		$R_{\theta JA}$	75	°C/W
Thermal resistance from Junction to Lead		$R_{\theta JL}$	24	°C/W
Junction temperature		T_J	150	°C
Storage temperature		T_{STG}	-55 ~+150	°C

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise specified)

Parameter	Symbol	Min	Typ	Max	Unit	Conditions
Drain-Source breakdown voltage	$V_{(BR)DSS}$*	30			V	V_{GS}=0V, I_D=250μA
Zero gate voltage drain current	I_{DSS}*			1	μA	V_{DS}=30V, V_{GS}=0V
Gate-body leakage current	I_{GSS}*			±100	nA	V_{DS}=0V, V_{GS}=±20V
Gate-threshold voltage	$V_{GS(th)}$*	1.5	1.9	2.5	V	V_{DS}=V_{GS}, I_D=250μA
On-State Drain Current	$I_{D(ON)}$	100			A	V_{DS}=5V, V_{GS}=10V
Drain-source on-resistance	$R_{DS(ON)}$*		9.5	11.5	mΩ	V_{GS}=10V, I_D=12A
			14	17	mΩ	V_{GS}=10V, I_D=12A, T_J=125°C
			12.5	15.5	mΩ	V_{GS}=4.5V, I_D=10A
Forward transconductance	g_{FS}		45		S	V_{DS}=5V, I_D=12A
Diode forward voltage	V_{SD}		0.75	1	V	I_S=1A, V_{GS}=0V
Diode forward current	I_S			4	A	
Input capacitance	C_{iss}		760		pF	V_{DS}=15V, V_{GS}=0V, f=1MHz
Output capacitance	C_{oss}		125		pF	
Reverse transfer capacitance	C_{rss}		70		pF	
Gate resistance	R_g	0.8	1.6	2.4	Ω	V_{DS}=0V, V_{GS}=0V, f=1MHz
Total gate charge	Q_g		6.6	12	nC	V_{GS}=4.5V,V_{DS}=15V,I_D=12A
Total gate charge			14	25	nC	V_{GS}=10V,V_{DS}=15V,I_D=12A
Gate-source charge	Q_{gs}		2.4		nC	
Gate-drain charge	Q_{gd}		3		nC	
Turn-on delay time	$t_{d(on)}$		4.4		nS	V_{GS}=10V, V_{DS}=15V, R_{GEN}=3Ω,R_L=1.25Ω
Turn-on rise time	t_r		9		nS	
Turn-off delay time	$t_{d(off)}$		17		nS	
Turn-off fall time	t_f		6		nS	
Body Diode Reverse Recovery Time	t_{rr}		7		nS	I_F=12A, dI/dt=500A/μ s
Body Diode Reverse Recovery Charge	Q_{rr}		8		nC	I_F=12A, dI/dt=500A/μ s

*Pulse test ; Pulse width ≤300μs, Duty cycle ≤ 0.5% .

LOW VOLTAGE MOSFET (N-CHANNEL)

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

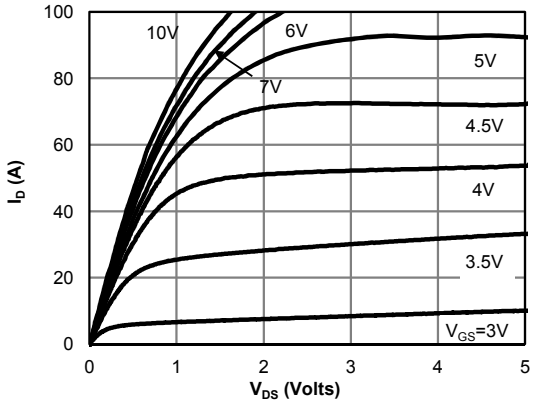

Fig 1: On-Region Characteristics

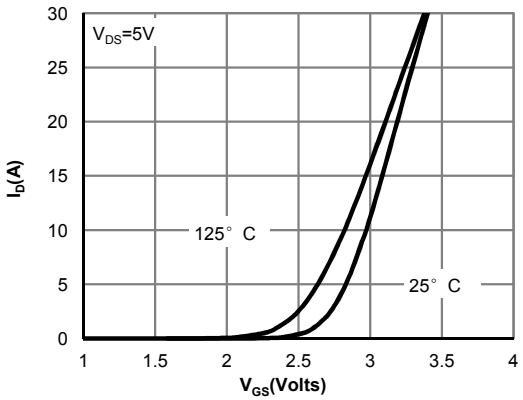

Figure 2: Transfer Characteristics

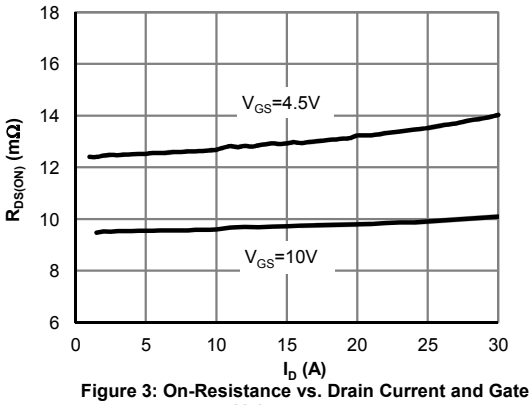

Figure 3: On-Resistance vs. Drain Current and Gate Voltage

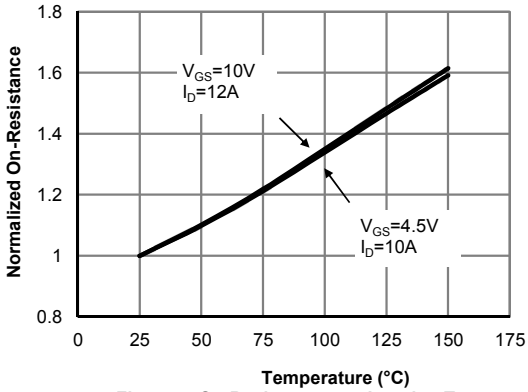

Figure 4: On-Resistance vs. Junction Temperature

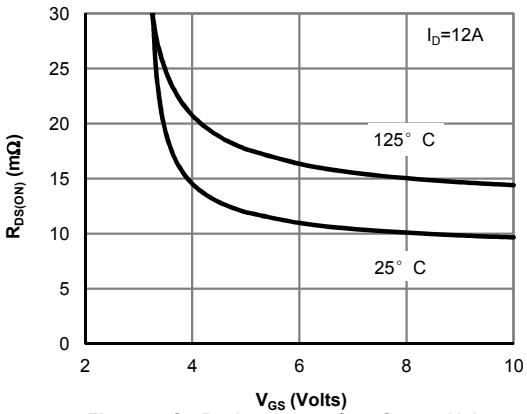

Figure 5: On-Resistance vs. Gate-Source Voltage

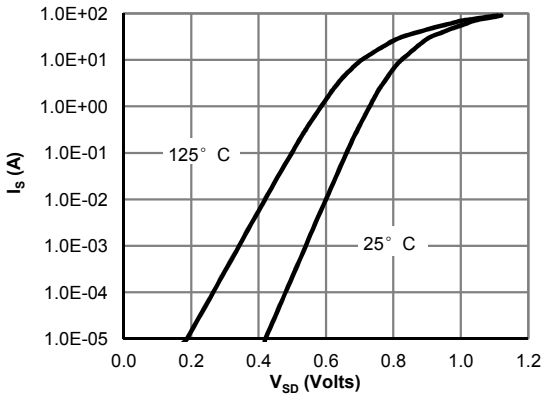

Figure 6: Body-Diode Characteristics

LOW VOLTAGE MOSFET (N-CHANNEL)

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

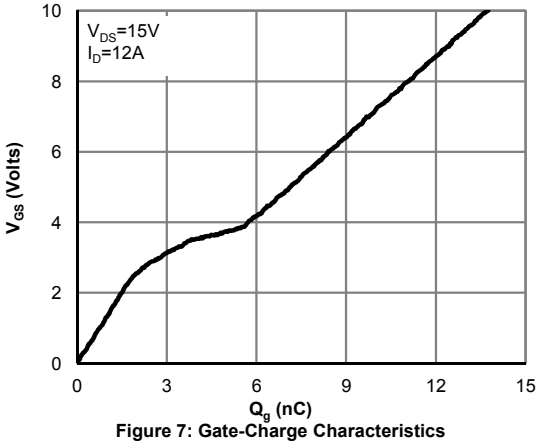

Figure 7: Gate-Charge Characteristics

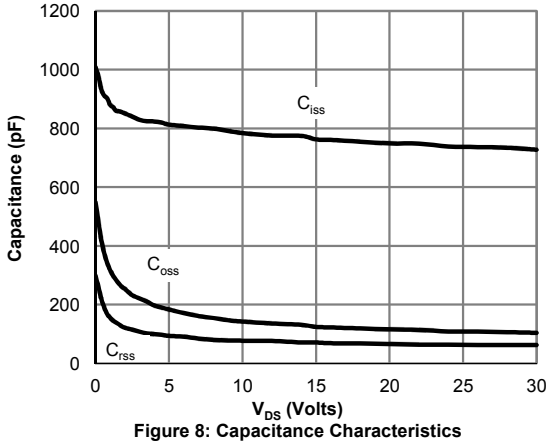

Figure 8: Capacitance Characteristics

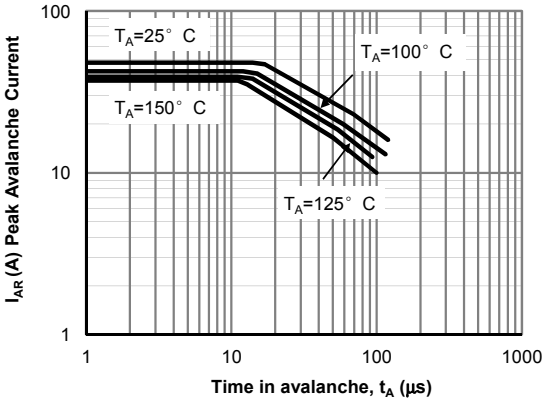

Figure 9: Single Pulse Avalanche capability

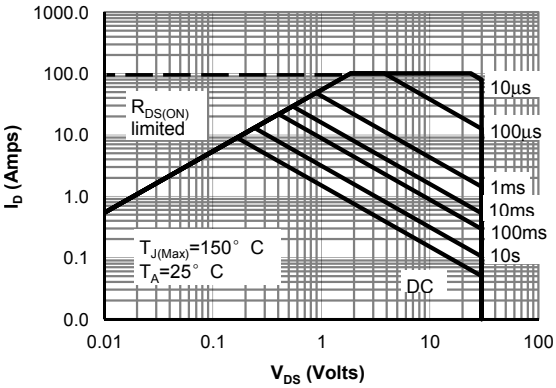

Figure 10: Maximum Forward Biased Safe Operating Area

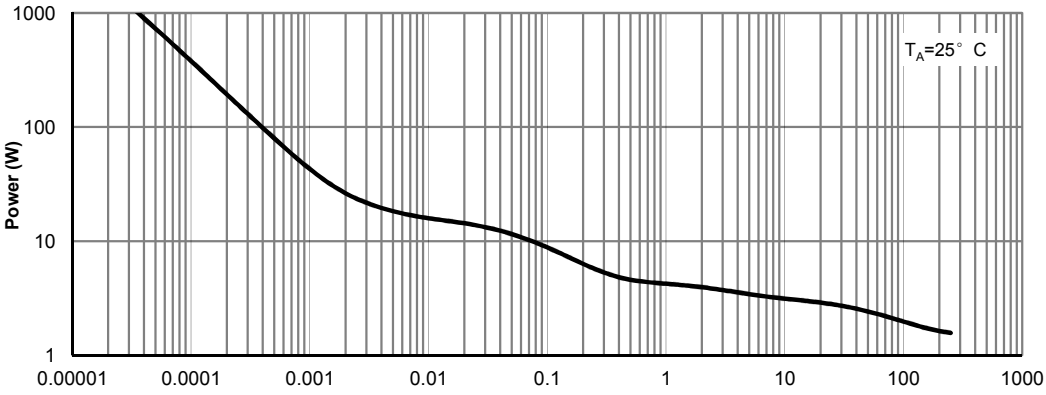

Figure 11: Single Pulse Power Rating Junction-to-Ambient

LOW VOLTAGE MOSFET (N-CHANNEL)

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

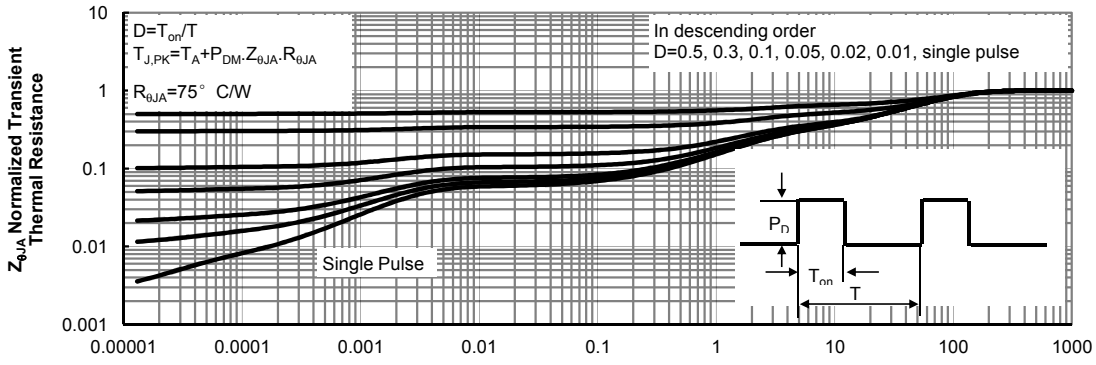

Figure 12: Normalized Maximum Transient Thermal Impedance

LOW VOLTAGE MOSFET (N-CHANNEL)

Gate Charge Test Circuit & Waveform

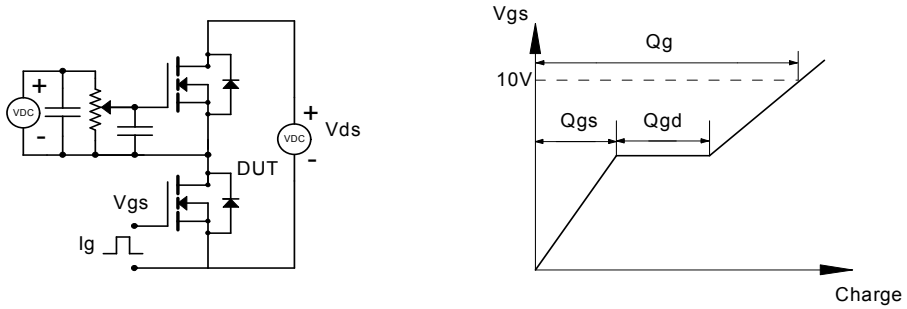

Resistive Switching Test Circuit & Waveforms

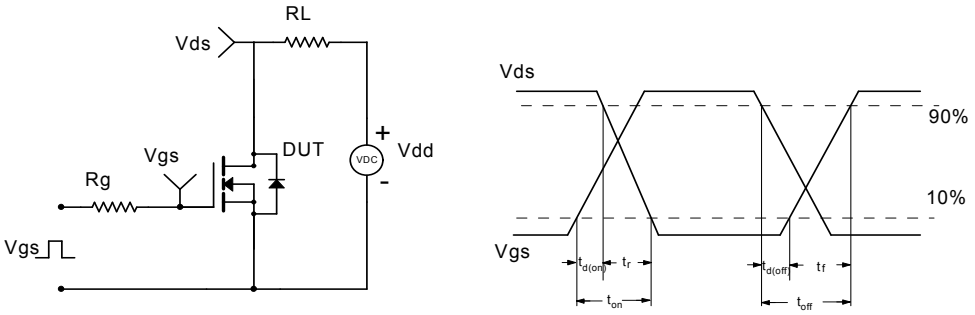

Unclamped Inductive Switching (UIS) Test Circuit & Waveforms

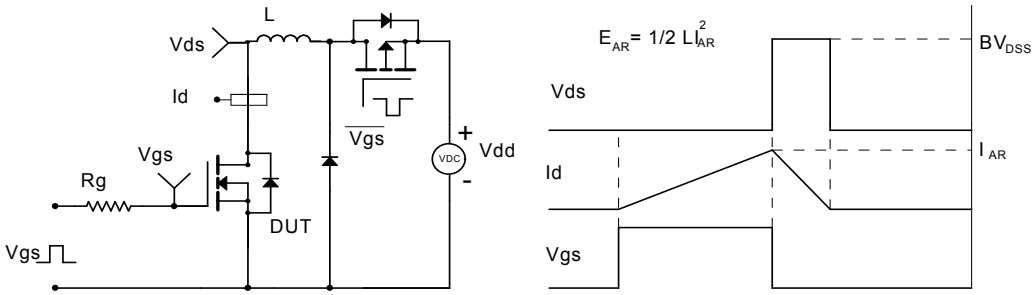

Diode Recovery Test Circuit & Waveforms

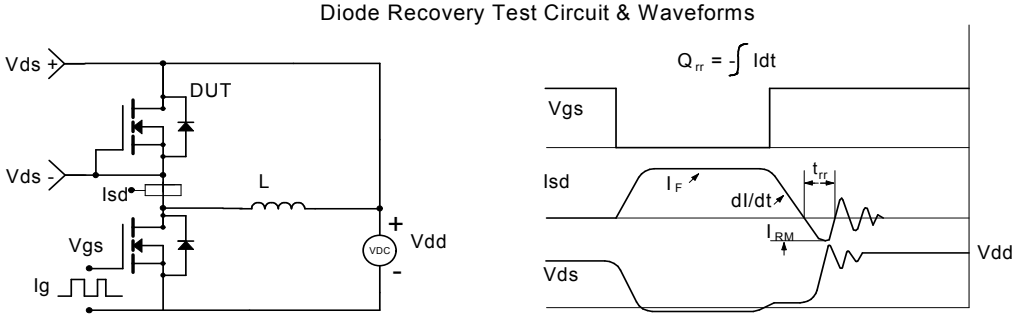

LOW VOLTAGE MOSFET (N-CHANNEL)

SOP-8 Package Outline Dimensions

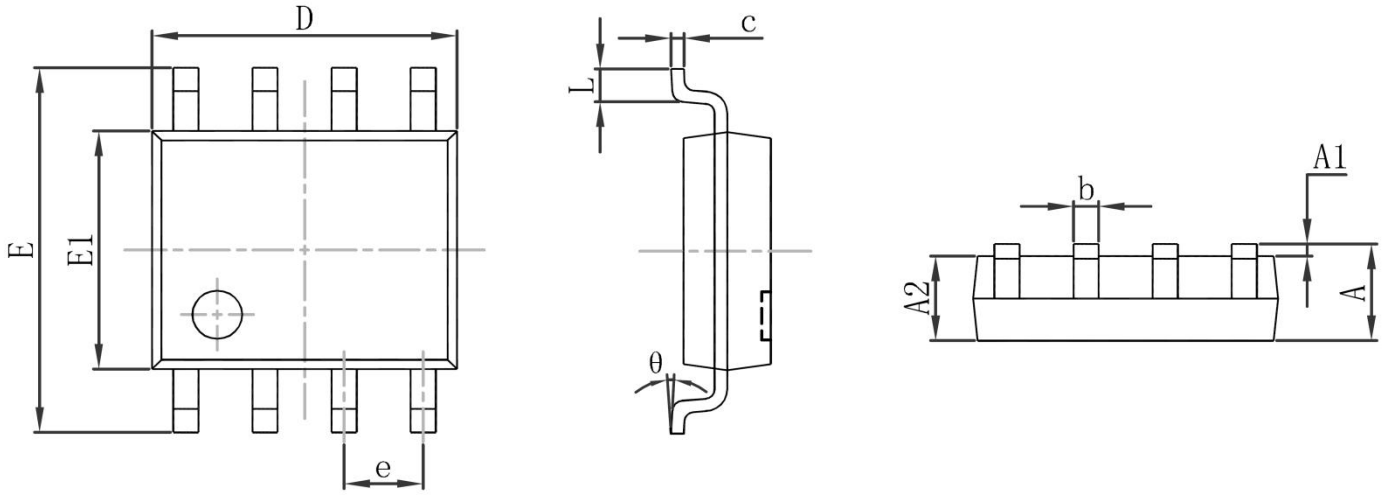

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	1.350	1.750	0.053	0.069
A1	0.100	0.250	0.004	0.010
A2	1.350	1.550	0.053	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.007	0.010
D	4.800	5.000	0.189	0.197
e	1.270(BSC)		0.050（BSC）	
E	5.800	6.200	0.228	0.244
E1	3.800	4.000	0.150	0.157
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°

SOP-8 Suggested Pad Layout

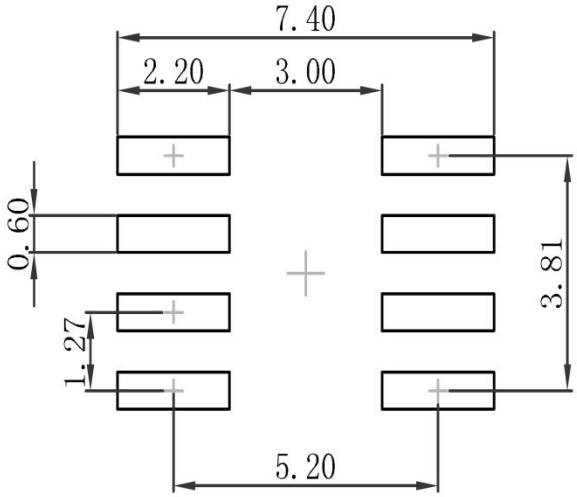

Note:

1.Controlling dimension: in millimeters

2.General tolerance: ±0.05mm

3.The pad layout is for reference purposes only

LOW VOLTAGE MOSFET (N-CHANNEL)

SOP-8 Tape and Reel

SOP-8 Embossed Carrier Tape

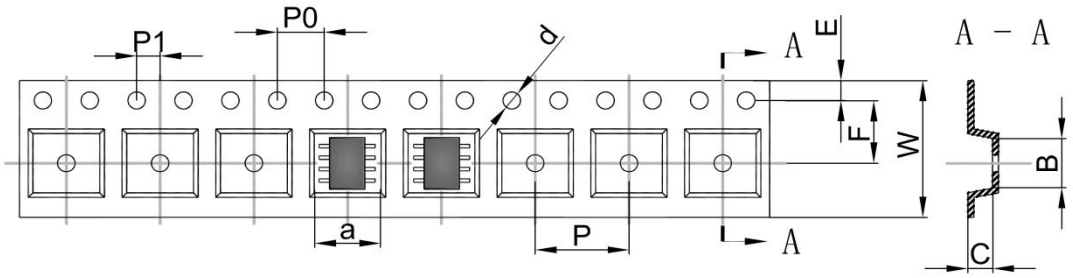

	DIMENSIONS ARE IN MILLIMETER									
TYPE	A	B	C	d	E	F	P0	P	P1	W
SOP-8	6.40	5.40	2.10	Ø1.50	1.75	5.50	4.00	8.00	2.00	12.00
TOLERANCE	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1

SOP-8 Tape Leader and Trailer

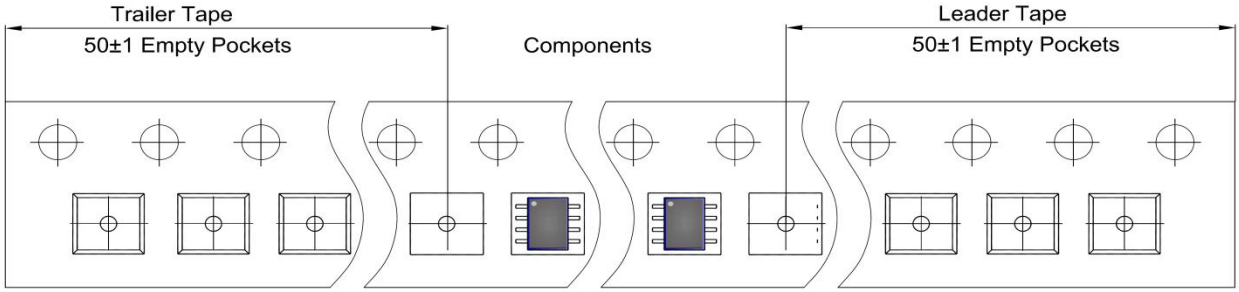

SOP-8 Reel

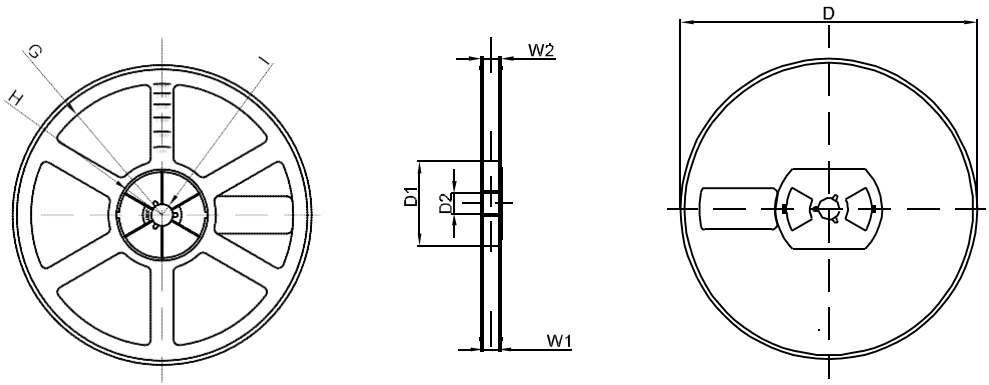

	DIMENSIONS ARE IN MILLIMETER							
REEL OPTION	D	D1	D2	G	H	I	W1	W2
13 ” DIA	Ø330.00	100.00	13.00	R151.00	R56.00	R6.50	12.40	17.60
TOLERANCE	±2	±1	±1	±1	±1	±1	±1	±1